




Spacer

Comb - Spacer

The spacer is made by injection moulding in virgin PP.

Colours: black or neutral on request.

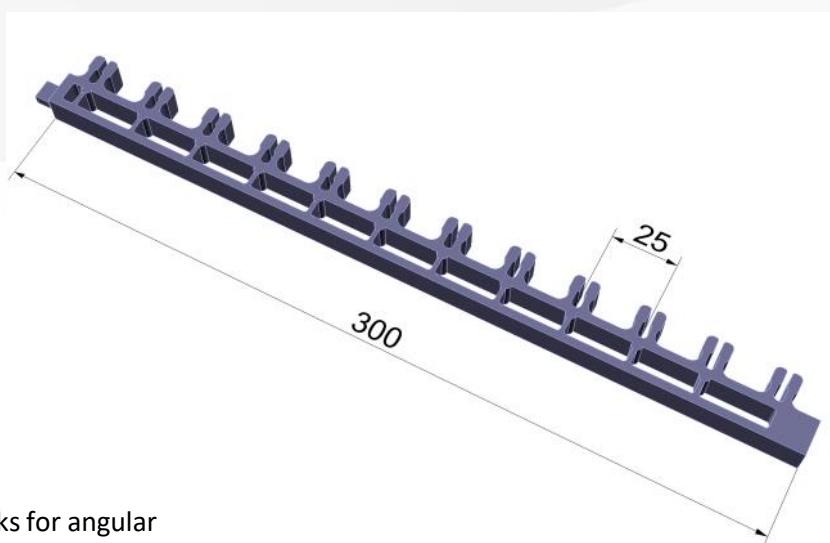

Nominal size:

- ❖ Length: 300 mm
- ❖ Step: 25 or 33 mm
- ❖ It can be provided with or without hooks for angular

How to choose spacer:

- ❖ DEP001: step 25 mm
- ❖ DEP002: step 25 mm
- ❖ DEP003: step 33 mm
- ❖ DEP004 :step 25 mm
- ❖ It must be fitted every 500-700 mm of height.

Advantage of use:

- ❖ Avoid bending the separator and then air by-pass
- ❖ Very easy to assemble the separator in battery through modularity
- ❖ Inexpensiveness compared to sheet metal solution (AISI)
- ❖ High resistance to mechanical stress
- ❖ High resistance to thermal stress
- ❖ High useful life of the product

	PP
Maximum operating temperature	90 °C